


Part. S0262



Chain - guide profile




| Material UHMWPE | Packaging metres | Code |
|-----------------|------------------|-----------------|
| ULF™ brown red | 45 | UL640913 |
| Green | 45 | 632272 |
| Black | 45 | 63651 |

- Standard packaging: coil.

Part. S0386



Chain - guide profile




| Material UHMWPE | Packaging metres | Code |
|-----------------|------------------|-----------------|
| ULF™ brown red | 45 | UL648363 |
| Black | 45 | 66096 |

- Can be used in combination with Part. S0387.
 - Standard packaging: coil.


- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.
 Characteristics: new material Polyethylene ULF™ brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:** $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$
 Calculation of thermal expansion see Technical information.
- **Operating temperature Green Black:**
 In air (- 40 to + 80 °C).
 In hot water (+ 70 °C).
- **Operating temperature ULF™ brown red:**
 In air (- 40 to + 45 °C).
 In hot water (+ 45 °C).
- **Polyethylene ULF™ is FDA approved**
 Polyethylene ULF™ complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.
- **Coefficient of friction between chain POM and wearstrip ULF™:** 0,08.
 Note: for calculation of chain pull refer to Technical Support.
- **Position of guides.** See Technical information.

• **TableTop® chains series 812 - 815 - 820 - 831 - 881TAB - 8811TAB - 879TAB - 880TAB**


Chain width 82,5 mm (K 325) / Guide clearance 45 mm

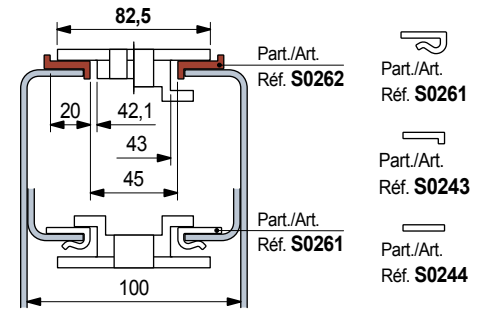

Chain width 114,3 mm (K 450)

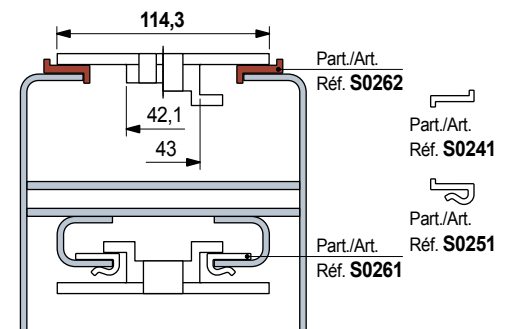

Chain width 82,5 mm (K 325) / Pitch 85 mm

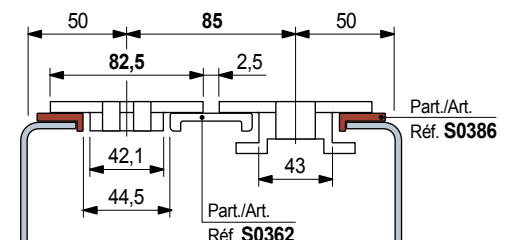

● Best Seller

● Standard

● On request: minimum quantity may apply.
 Consult our Customer Service for availability.

Item code for order = Part. + Code