



- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.
Characteristics: new material Polyethylene ULF™ brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:** $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$
Calculation of thermal expansion see Technical information.
- **Operating temperature Green Black:**
In air (- 40 to + 80 °C).
In hot water (+ 70 °C).
- **Operating temperature ULF™ brown red:**
In air (- 40 to + 45 °C).
In hot water (+ 45 °C).
- **Polyethylene ULF™ is FDA approved**
Polyethylene ULF™ complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.
- **Coefficient of friction between chain POM and wearstrip ULF™:** 0,08.
Note: for calculation of chain pull refer to Technical Support.
- **Position of guides.** See Technical information.


- **Use of part. S0742**
Ideal with TableTop® chains width 114,3 mm (K450).
Chain width 114,3 mm (K 450).

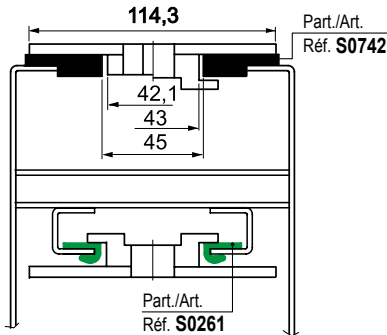


- **Use of part. S0674**
Ideal as intermediate support for wide chains.
TableTop® chains series 820 width 190,5 (K750).

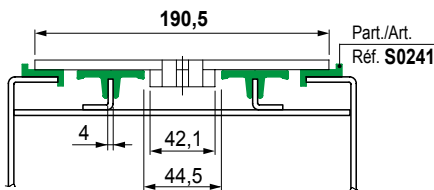

- TableTop® double hinge chains series 821 width 304,8 (K1200).

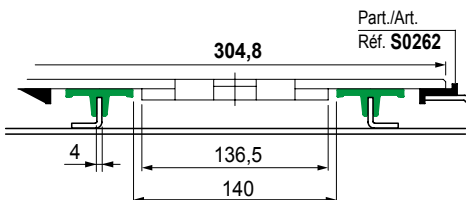

Chain - guide profile



Material	Length metres	Code
UHMWPE		
Black	3	617973N


- Material: Polyethylene UHMWPE with molecular density 1.000.000 g/mol.
- Packaging: 48 metres.

Part. S0742



Reinforced version

Chain - guide profile

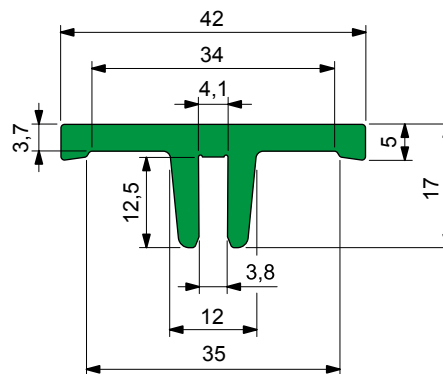

Material	Length metres	Code
UHMWPE		
Green	3	675792
	6	675802

- Applicable to 4 mm thick sheet metal.
- Packaging: 24 metres.

Part. S0674



- Best Seller
- Standard
- On request: minimum quantity may apply. Consult our Customer Service for availability.

Item code for order = Part. + Code