

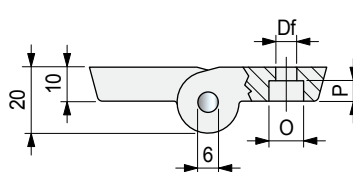


Part. S0337

■ 270° hinge

**NEW
DESIGN**






Fixing screws dia.	Code	ø Df mm	O mm	P mm	Weight gr	Packaging No. of pieces
M 6	67023	6,5	10,5	6	55	24
M 8	60334	8,5	13,5	4		

- Material: hinge in reinforced polyamide PA FV (black). Pin in ferritic stainless steel.
- Max recommended tightening torque: 0,5 Kgm.

Part. S0260

■ 170° hinge



E mm	Fixing screws dia.	Code	ø Df mm	F mm	G mm	O mm	P mm	L mm	Weight gr	Packaging No. of pieces
11,5	M 6	65021	6,5	14,5	23,5	10,5	6	35	110	20
	M 8	66546	8,5			13,5	8			
18	M 6	65011	6,5	21	30	10,5	6	22	130	
	M 8	66556	8,5			13,3	8			

- Material: hinge in polyamide PA (black). Pin in austenitic stainless steel.
- Max recommended tightening torque: 0,5 Kgm (with M6 screws), 1 Kgm (with M8 screws).

● Best Seller


● Standard

● On request: minimum quantity may apply. Consult our Customer Service for availability.

Item code for order = Part. + Code

■ 170° hinge

Part. **S0260**

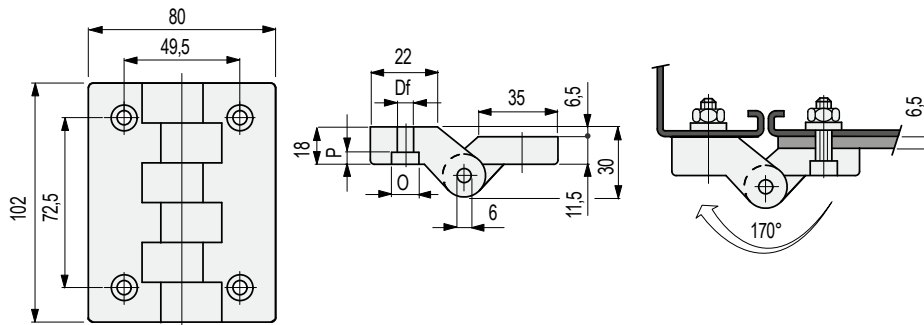

Fixing screws dia.	Code	Ø Df mm	O mm	P mm	Weight gr	Packaging No. of pieces
M 6	65031	6,5	10,5	6	120	20
M 8	66566	8,5	13,5	4		

- Material: hinge in polyamide PA (black). Pin in austenitic stainless steel.
- Max recommended tightening torque: 0,5 Kgm (with M6 screws), 1 Kgm (with M8 screws).



**For misaligned mounting
surfaces**

● Best Seller

● Standard

● On request: minimum quantity may apply.
Consult our Customer Service for availability.

Item code for order = Part. + Code