


Part. **S0839**



■ Neck transport guides

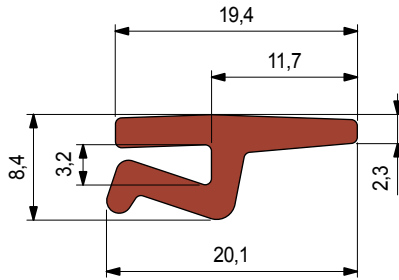


Material	Packaging metres	Code
UHMWPE		
ULF - brown red	30	UL640063

- Standard packaging: coil.

Part. **S0835**



■ Neck transport guides





Material	Length metres	Code
UHMWPE		
ULF - brown red	3	UL636573N

- Min. curvature radius: 750 mm.
- Packaging: 45 metres.

- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.
Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:** $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$
Calculation of thermal expansion see Technical information.
- **Operating temperature ULF - brown red:**
In air (- 40 to + 45 °C).
In hot water (+ 45 °C).
- **Polyethylene ULF is FDA approved**
Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.

• **Use** Part. S0839 - S0835 - S0594 - S0654
Overhead transport of PET bottles.

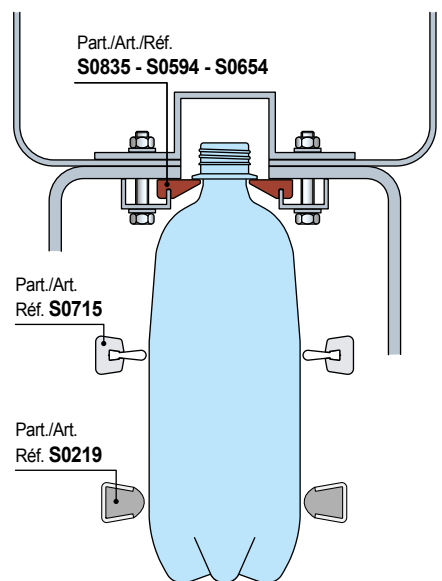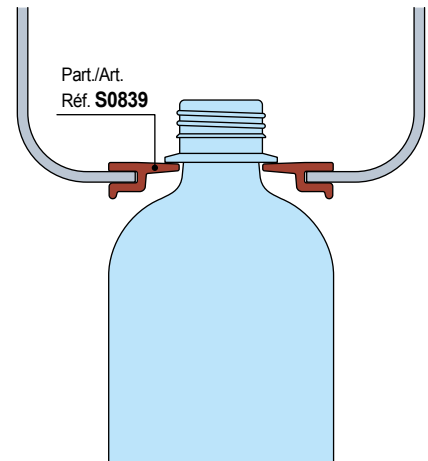

● Best Seller

● Standard

● On request: minimum quantity may apply. Consult our Customer Service for availability.

Item code for order = Part. + Code