

Articulated Feet

in reinforced polyamide and polypropylene

Ø124

REXNORD

- **Best Seller**
- **Standard**
- ✓ **On request**

Spindle type

Footplate in polyamide PA FV

Footplate in polypropylene PP FV

Fmax.
N

Code

feet supplied without anti-slip


Spindle in stainless steel

M16	255	200	21	-	13	604993	-	45000 (PA FV)
M20	140	81	-	22	30	624802	628682	
	205	146	-	22	30	624812	628692	
M24	205	152	21	-	19	624822	628702	13000 (PP FV)
M30	205	152	21	-	24	624832	628712	

Spindle in zinc plated steel								
M16	255	200	-	22	24	624842	628722	
	255	200	21	-	13	604983	-	45000
M20	140	81	-	22	30	624852	628732	(PA FV)
	205	146	-	22	30	624862	628742	
	205	154	21	-	17	611653	636162	13000
M24	255	195	-	22	30	624872	628752	(PP FV)
	145	91	21	-	19	624882	628762	
	205	152	21	-	19	624892	628772	


Item code for order = Part. + Code

- Footplate material: reinforced polyamide PA FV (black) and reinforced polypropylene PP FV (black).
- Packaging: 8 pieces.
- Anti-slip supplied separately (on request supplied fixed to the foot).
- On request different length.
- Fmax. = maximum applicable load in static conditions.

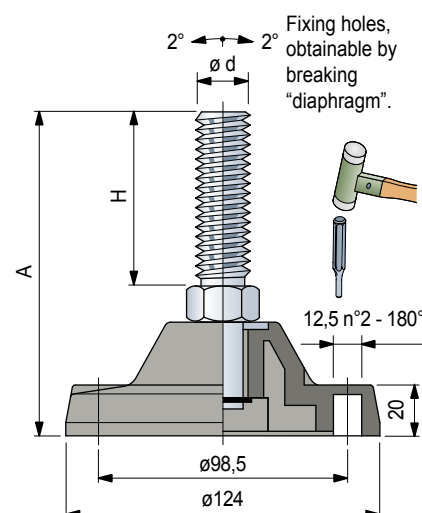

Accessories

Anti-slip




- Code with reinforcement disc: **R0000630082**.
- Code without reinforcement disc: **R0000630092**.
- Assembly: with screws for plate supplied loose.
- Material: NBR rubber (black), 80 Shore.
- Packaging: 8 pieces.


Part. R0726 - Spacer



- Code: **688772**.
- Material: acetal POM (black).
- Weight: 1,15 Kg.
- Packaging: 8 pieces.

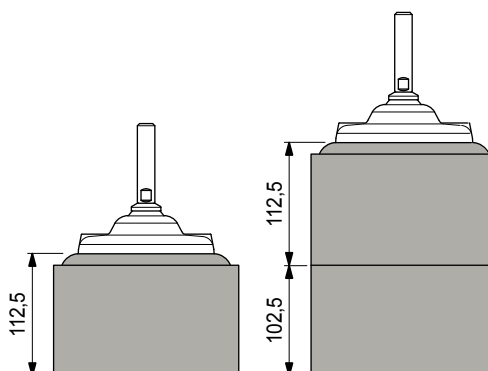

Nut + Washer



Code		h	ØD	s
Stainless steel AISI 304	Zinc plated steel	mm	mm	mm
M16	R0000630212	13	24	30
M20	R0000630222	16	30	37
M24	R0000630232	19	36	44
M30	R0000630242	24	46	56

Packaging: 8 pieces